

**Overview**

- 0 ... 3 mm
- current output
- connector M8
- -10 ... 70 °C
- IP 67



Picture similar



**Technical data**

**General data**

Mounting type	Quasi-flush
Measuring distance Sd	0 ... 3 mm
Resolution	< 0.001 mm (stat.) < 0.01 mm (dynam.)
Repeat accuracy	0.02 mm
Linearity error	± 120 µm (S = 0,75 ... 2,25 mm) ± 360 µm (S = 0 ... 3 mm)
Temperature drift	± 4 % (Full Scale: 0 ... +60 °C) ± 6 % (Full Scale: -10 ... +70 °C)

**Electrical data**

Response time (factory characteristic)	< 0.5 ms
Voltage supply range +Vs	6 ... 36 VDC
Current consumption max. (no load)	12 mA

**Electrical data**

Output circuit	Analog 0 ... 10 mA
Load resistance	< 100 Ohm/V * Vs - 400 Ohm > 500 Ohm (Vs = 30 ... 36 VDC)
Short circuit protection	Yes
Reverse polarity protection	Yes


**Mechanical data**

Design	Cylindrical smooth
Material (sensing face)	PBT
Housing material	Stainless steel
Dimension	6.5 mm
Housing length	46 mm
Connection types	Connector M8


**Ambient conditions**

Operating temperature	-10 ... +70 °C
Protection class	IP 67


**Dimension drawing**

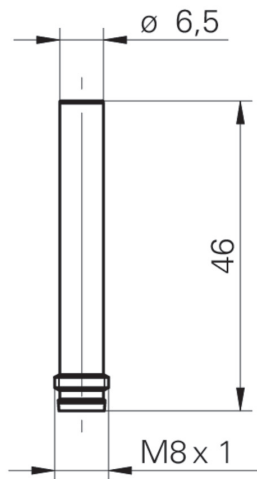

**Connection diagram**

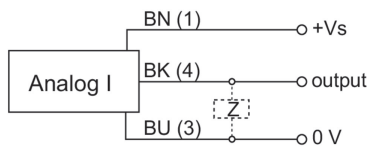

**Pin assignment**



**Accessories**

**Mounting accessories**

10109474	10109474
10117742	10117742